

DAC-101

Moisture Guard Rust Inhibitor

PERFORMANCE CHARACTERISTICS:

- Seals against corrosion and prevents moisture without bleeding
- Won't leech into ejectors, cams or core pins to cause bleeding
- Exceptional water repelling qualities
- Increases short and long term protection
- Rapid flash time
- Maximum efficiency, minimum labor
- Reduces excess usage and waste
- Will NOT induce bleeding
- Contains no fillers, only pure active ingredients
- Easily removed by flushing


DESCRIPTION:

DAC-101 Moisture Guard is a distinctive formulation that was developed to maximize performance in short and long term moisture displacement and rust prevention situations. We are all well aware of the cost involved by rejected parts due to marking. This is typically caused by excess penetration of product into ejector pins, cams, and slides. DAC-101 Moisture Guard eliminates this problem entirely due its rapid flash time, preventing running or dripping and therefore will not induce any kind of contamination due to leeching or bleeding. A light coating of DAC-101 Moisture Guard is all that is needed. Once applied it will remain active for extended periods of time.

REMOVAL SPECIFICATIONS:

Due to Moisture Guard's unique formulation it can simply and easily be removed by flushing with DAC-103 Universal All Purpose Degreaser with no risk of contamination.

Moisture Guard displaces moisture and provides a coating of excellent film strength which protects molds from both short and long-term corrosion.

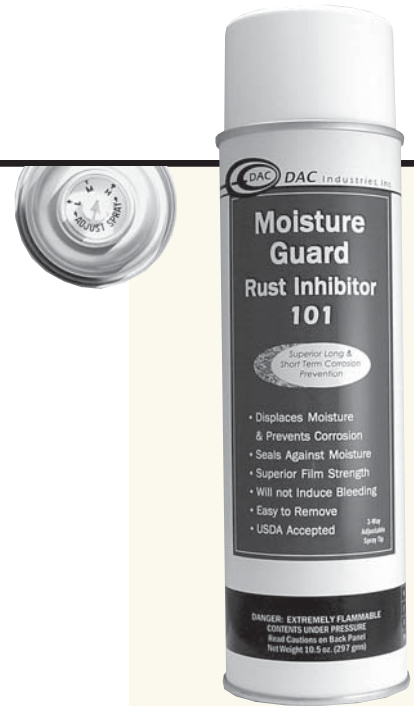

Call for Orders, Product Information and Technical Support:

1-800-830-3423

NPCA Hazardous Materials ID System

Health	1
Flammability	4
Reactivity	0
Personal Protection	*

©2004 DAC Industries, Inc. All Rights Reserved



DAC Industries, Inc.
1730 Gervais Avenue East
Maplewood, MN 55109 USA

tel: 1-651-748-1750
fax: 1-651-748-1748
info@moldsprays.com
www.moldsprays.com