


# DAC-200

# Die Lube 2000 Lubricant

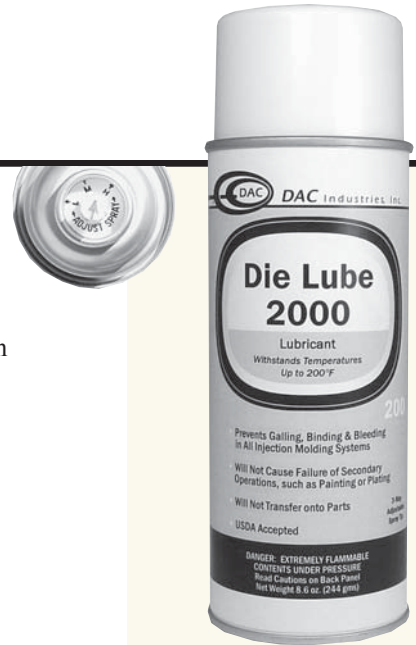

## Why was DIE LUBE 2000 developed?

Die Lube 2000 was created for applications that demand a high level of lubrication under extreme conditions. Die Lube 2000 was designed to provide excellent lubrication with a dry film formulation. The active ingredients will adhere to metal, maintaining a durable coating that will eliminate any chance of galling and binding. This will eradicate any wear on slides, cams and ejector pins or other areas where metal to metal contact occurs. This product shows outstanding results in temperatures ranging from -30° to 140°F. Because it is a dry film, it will never induce bleeding or contamination.

## PERFORMANCE HIGHLIGHTS:

- Pure lubrication
- Forms a strong barrier against galling, binding and wear
- Excellent choice for robotic applications
- Extreme temperature capabilities
- Dry formula
- 3 way adjustable spray tip for accurate application

## CAUTION:

To maintain maximum performance and to avoid contamination, do not use this product in conjunction with any mineral or lithium based product.

## APPLICATION:

See our procedure sheets and tutorials for information on application, performance and compatibility.

### NPCA Hazardous Materials ID System

|                     |   |
|---------------------|---|
| Health              | 1 |
| Flammability        | 4 |
| Reactivity          | 0 |
| Personal Protection | * |

©2004 DAC Industries, Inc. All Rights Reserved

Call for Orders, Product Information and Technical Support:

**1-800-830-3423**



DAC Industries, Inc.  
1730 Gervais Avenue East  
Maplewood, MN 55109 USA

tel: 1-651-748-1750  
fax: 1-651-748-1748  
info@moldsprays.com  
www.moldsprays.com