

DAC-425


# Semi Dry Pneumatic Air Tool Oil

DAC's Semi Dry Pneumatic Air Tool Oil provides you with the most unique solvent and extreme pressure lubrication package ever offered. Semi Dry Pneumatic Air Tool Oil's formulation contains specially selected additives that, when combined, enhance lubrication and anti-wear protection.

Semi Dry Pneumatic Air Tool Oil's anti-wear package will prevent gumminess, sludge, binding and metal to metal wear. This product's unique solvent package displaces moisture and has a 2-1/2 minute drying time that will control and eliminate excess seepage and contamination.

**DIRECTIONS:**

Squeeze a generous amount into the air opening and reconnect the air hose. Run the pneumatic air tool for 3 to 5 seconds and let stand for an additional 30 seconds. After 30 second stand by time, run the pneumatic air tool 5 to 10 additional seconds. This will give you maximum results and penetration. For best performance, use daily. Wipe off excess.

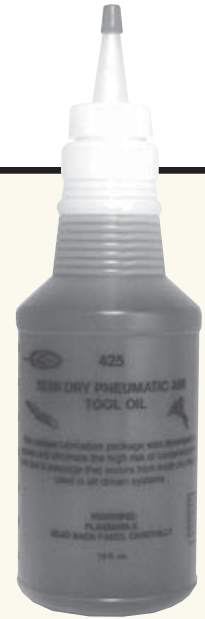

Call for Orders, Product Information and Technical Support:  
**1-800-830-3423**

**NPCA Hazardous Materials ID System**

Health	1
Flammability	3
Reactivity	0
Personal Protection	*

©2004 DAC Industries, Inc. All Rights Reserved



DAC Industries, Inc.  
1730 Gervais Avenue East  
Maplewood, MN 55109 USA

tel: 1-651-748-1750  
fax: 1-651-748-1748  
info@moldsprays.com  
www.moldsprays.com